


HV

FTA6..

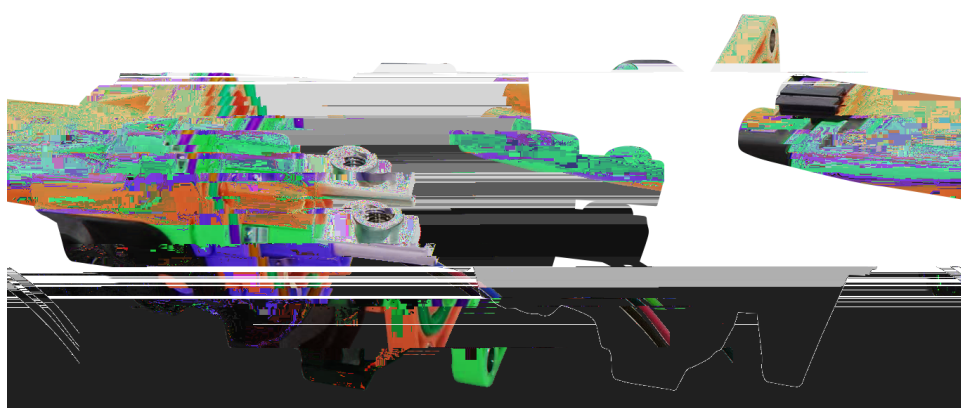

FTA6 . .

HVA800

PDU



插 型号明

/	FTA6 . . 40 (FA25	* 位 插	25 k k °
0	FTA6 . . 40 (HA35	* 位 插	35 k k °
1	FTA6 . . 40 (FA50	* 位 插	50 k k °
2	FTA6 . . 80 (HA03	* 位 插	03 k k °
3	FTA6 . . 80 (FA13	* 位 插	13 k k °
4	FTA6 . . 80 (HA50	* 位 插	50 k k °

(? @ A B四

插座型号明

			尾部孔规格
/	FTA6 . 0 . 2 (FH	插座* 位 插	M6
0	FTA6 . . 02 (HY	插座* 位 插	M6





(A B C、D四 。



	10 . . T BA	ØN45	PA66+GF25
	12 . ? 4 125 k k ° 15 . ? 4 135 k k ° 20 . ? 4 150 k k °	+2 . .) / 03	SJ72 T+ .
		25~50mm²	铜合金
	≥2000MΩ	14 . 8	镀银
	3000T ?A	°	硅橡胶







,5

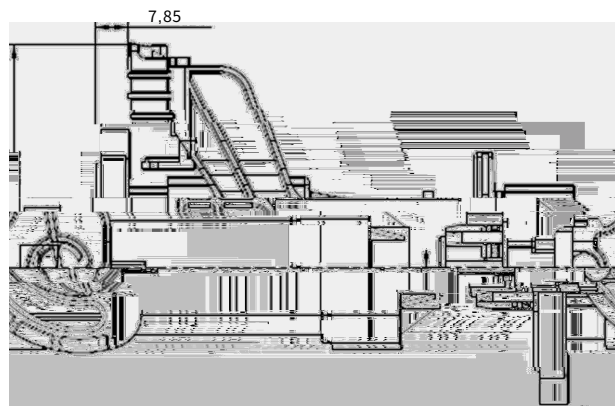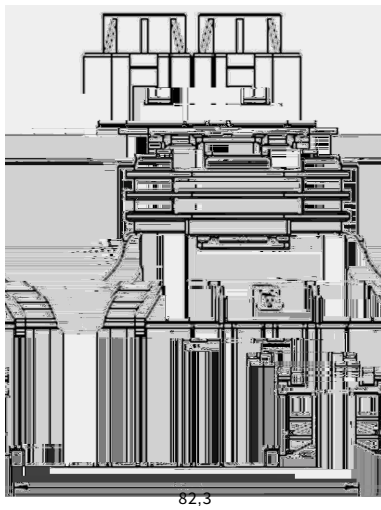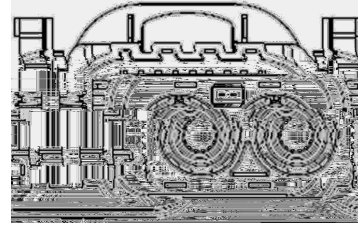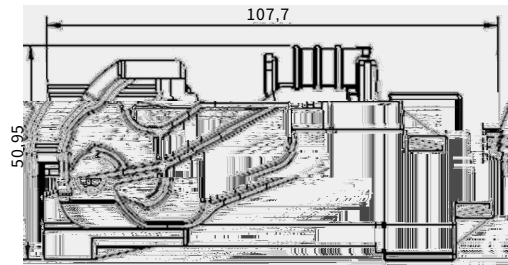


HVA800



弯

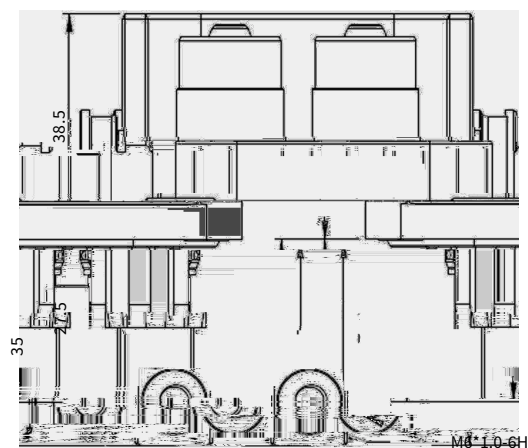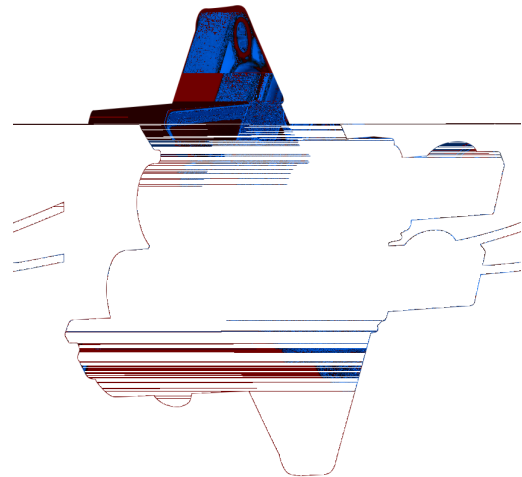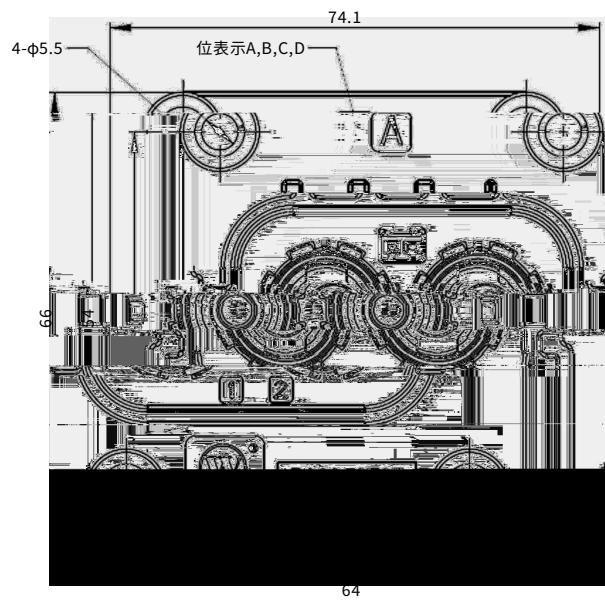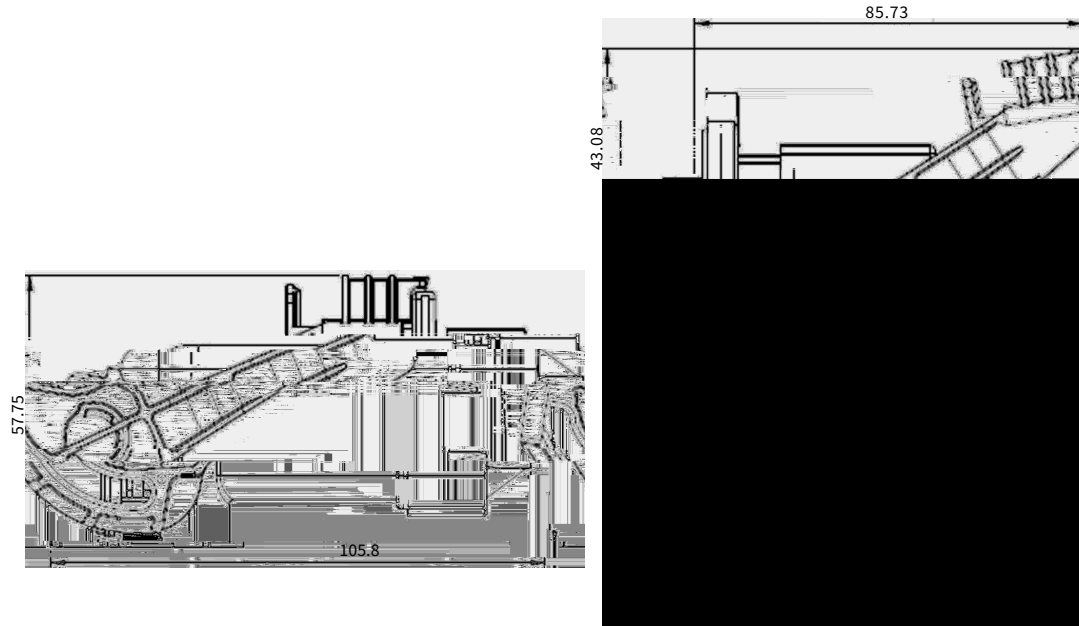

/6.

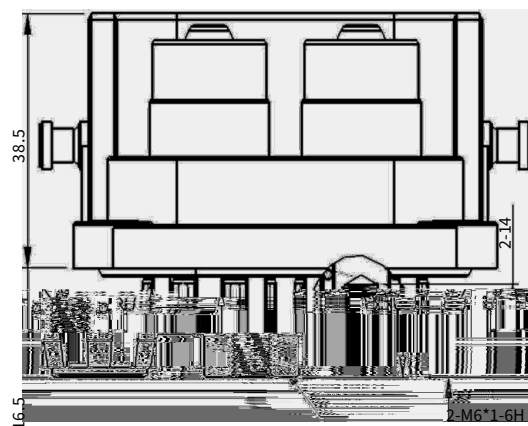

7.

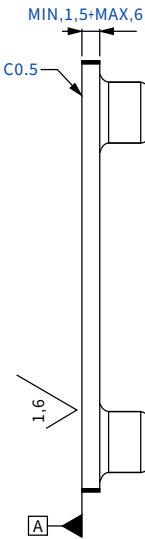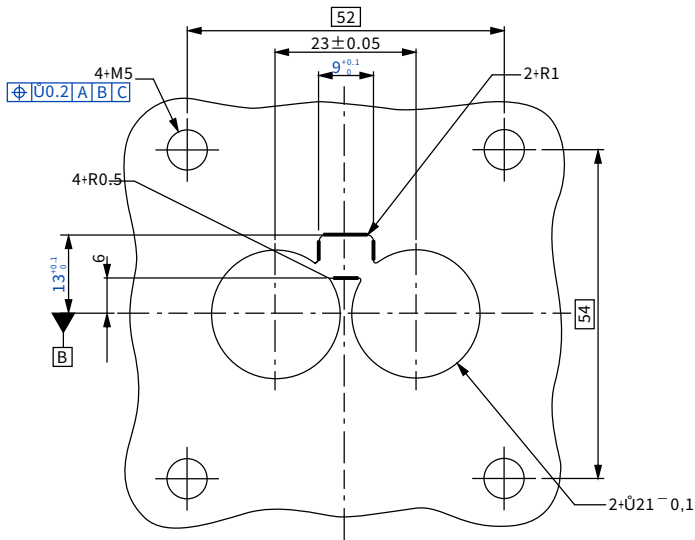

HVA800

.27

FVA80.	62	?	F	C50
+ 插	+ 插			
llcw' ?*@*A*B				
F+	L+不			
接	格	kk ⁴	kk ⁴	kk ²

FVA80.	02	?	F	H
+插座				
+插				